

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
28 November 2002 (28.11.2002)


PCT

(10) International Publication Number
WO 02/096052 A1

- (51) International Patent Classification⁷: **H04L 27/00** (74) Agents: **TRIPOLI, Joseph, S. et al.**; Thomson multimedia Licensing Inc., P.O. Box 5312, Princeton, NJ 08540 (US).
- (21) International Application Number: **PCT/US02/15412**
- (22) International Filing Date: **17 May 2002 (17.05.2002)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
60/292,358 **21 May 2001 (21.05.2001)** **US**
- (71) Applicant (for all designated States except US):
ATLINKS USA, INC. [US/US]; 10330 N. Meridan Street, INH-340, Indianapolis, IN 46290-1024 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **MOHAN, Chandra** [IN/US]; 12970 Fleetwood Drive North, Carmel, IN 46032 (US). **LEE, Jeffrey, Huat-Chye** [US/US]; 1265 Helfrod Lane, Carmel, IN 46032 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: **NARROW BAND CHAOTIC BI-PHASE SHIFT KEYING**

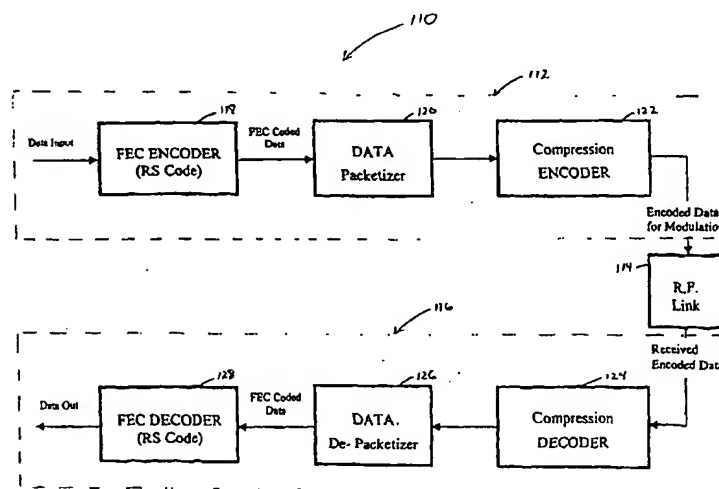

(57) Abstract: A system (110) and method for signal transmission and reception by narrow band chaotic bi-phase shift keying includes a forward error correction encoder (118) for receiving input data, a data packetizer (120) in signal communication with the forward error correction encoder, a compression encoder (122) in signal communication with the data packetizer, a radio frequency link (114) in signal communication with the compression encoder, a compression decoder (124) in signal communication with the radio frequency link, a data depacketizer (126) in signal communication with the compression decoder, and a forward error correction decoder (128) in signal communication with the data depacketizer for recovering the input data by controlling the orbits of chaos; where the method includes the steps of transmitting a signal indicative of chaotic bi-phase shift keyed data, propagating the transmitted signal within a narrow frequency band, and receiving the propagated signal substantially without degradation of the indicated data by controlling the orbits of chaos.

WO 02/096052 A1



— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

NARROW BAND CHAOTIC BI-PHASE SHIFT KEYING

5 BACKGROUND

The present disclosure relates to signal transmission and reception, and more particularly relates to signal transmission and reception using a composite information and chaos signal that is modulated onto a carrier by bi-phase shift keying.

10 There have been a number of approaches to the design of communication systems based on chaos, such as those suggested by Kocarev (1992), Belsky and Dmitriev (1993), Cuomo (1993), Pecora and Carrol (1993), and Dmitriev and Starkov (1997). These prior approaches have been focused on analog spread-spectrum types of systems and, hence, were inherently broadband. Moreover,
15 the prior approaches made no attempt to restrict the state-space orbits of chaotic systems through symbolic constraints. Such systems have lacked symbolic dynamic controls or channel bandwidth controls.

The following are some definitions provided to enhance understanding of the descriptions that follow:

20 In geometry, linearity refers to Euclidean objects such as lines, planes, (flat) three-dimensional space, and the like. These objects appear the same no matter how they are examined. A nonlinear object, such as a sphere, for example, looks different for different scales. When viewed closely, it looks like a plane; and from afar, it looks like a point. In algebra, linearity is defined in terms
25 of functions that have the properties $f(x+y)=f(x)+f(y)$ and $f(ax)=a f(x)$. Nonlinearity is defined as the negation of linearity. This means that the result $f(x+y)$ may be out of proportion to the inputs x and/or y . Thus, nonlinear systems do not follow superposition themes.

A dynamical system has an associated abstract phase space or state
30 space with coordinates that describe the dynamical state at any instant; and a dynamical rule that specifies the immediate future trend of all state variables, given the present values of those state variables. Dynamical systems are

2

"deterministic" if there is a unique consequent to every state; and "stochastic" or "random" if there is more than one consequent, typically chosen from some probability distribution. A dynamical system can be defined with respect to discrete or continuous time. The discrete case is defined by a map, $z_1 = f(z_0)$, which gives the state z_1 resulting from the initial state z_0 at the next discrete time value. The continuous case is defined by a "flow", $z(t) = \phi(t)(z_0)$, which gives the state at time t given that the state was z_0 at time 0. A smooth flow can be differentiated with respect to ("w.r.t.") time to give a differential equation, $dz/dt = F(z)$. In this case, $F(z)$ is called a vector field, which gives a vector pointing in the direction of the velocity at every point in a phase space.

A phase space or state space is the collection of possible states of a dynamical system. A state space can be finite (e.g., for the ideal coin toss, there are two states, heads and tails), countably infinite (e.g., where the state variables are integers), or uncountably infinite (e.g., where the state variables are real numbers). Implicit in the notion of state or phase space is that a particular state in phase space specifies the system completely. It is all one needs to know about the system to have complete knowledge of the immediate future.

Thus, the phase space of the planar pendulum is two-dimensional, consisting of the position or angle and velocity. Note that in a non-autonomous system where the map of the vector field depends explicitly on time (e.g., a model for plant growth that depends on solar flux), then, according to the definition of phase space, time must be included as a phase space coordinate since one must specify a specific time (e.g., 3 pm on Tuesday) to know the subsequent motion. Thus $dz/dt = F(z, t)$ is a dynamical system on the phase space consisting of (z, t) , with the addition of the new dynamic $dt/dt = 1$. The path in phase space traced out by a solution of an initial value problem is called an orbit or trajectory of the dynamical system. If the state variables take real values in a continuum, the orbit of a continuous-time system is a curve; while the orbit of a discrete-time system is a sequence of points.

The notion of degrees of freedom as is used for Hamiltonian systems means one canonical conjugate pair: a configuration, q , and its conjugate momentum, p . Hamiltonian systems always have such pairs of variables and so

the phase space is even-dimensional. In dissipative systems, the term phase space is often used differently to designate a single coordinate dimension of phase space.

A map is a function f on the phase space that gives the next state $f(z)$ (i.e., the "image") of the system given its current state z . A function must have a single value for each state, but there may be several different states that give rise to the same image. Maps that allow every state of the phase space to be accessed onto and which have precisely one pre-image for each state (i.e., a one-to-one correspondence) are invertible. If, in addition, the map and its inverse are continuous with respect to the phase space coordinate z , then it is called a homeomorphism. Iteration of a map means repeatedly applying the consequents of the previous application. Thus producing the sequence:

$$z_n = f(z_{n-1}) = f(f(z_{n-2})) = \dots = f(f(\dots f(f(z_0)) \dots)) \quad (1)$$

where this sequence is the orbit or trajectory of the dynamical system with initial condition z_0 .

Every differential equation gives rise to a map. The time1 map advances the flow one unit of time. If the differential equation contains a term or terms periodic with time T , then the time T map in a system represents a Poincare section. This map is also called a stroboscopic map as it is effectively looking at the location in phase space with a stroboscope tuned to the period T . This is useful as it permits one to dispense with time as a phase space coordinate.

In autonomous systems (i.e., no time dependent terms in the equations), it may also be possible to define a Poincare section to reduce the phase space coordinates by one. Here, the Poincare section is defined not by a fixed time interval, but by successive times when an orbit crosses a fixed surface in the phase space. Maps arising out of stroboscopic sampling or Poincare sections of a flow are necessarily invertible because the flow has a unique solution through any point in phase space. Thus, the solution is unique both forward and backward in time.

An attractor is simply a state into which a system settles, which implies that dissipation is needed. Thus, in the long term, a dissipative dynamical system may settle into an attractor. An attractor can also be defined as the phase space that has a neighborhood in which every point stays nearby and approaches the attractor as time goes to infinity. The neighborhood of points that eventually approach the attractor is the "basin of attraction".

Chaos is defined as the effective unpredictable long term behavior arising in a deterministic dynamic system due to its sensitivity to initial conditions. It must be emphasized that a deterministic dynamical system is perfectly predictable given knowledge of its initial conditions, and is in practice always predictable in the short term. The key to long-term unpredictability is a property known as sensitivity to initial conditions. For a dynamical system to be chaotic, it must generally have a large set of initial conditions that are highly unstable. No matter how precisely one measures the initial conditions, a prediction of its subsequent motion eventually goes radically wrong.

Lyapunov exponents measure the rate at which nearby orbits converge or diverge. There are as many Lyapunov exponents as there are dimensions in the state space of the system, but the largest is usually the most important. Roughly speaking, the maximal Lyapunov exponent is the time constant λ in the expression for the distance between two nearby orbits. If λ is negative, the orbits converge in time and the dynamical system is insensitive to initial conditions. If λ is positive, then the distance between nearby orbits grows exponentially in time and the system becomes sensitive to initial conditions.

Lyapunov exponents can be computed in two ways. In one method, one chooses two nearby points and evolves them in time measuring growth rates of the distance between them. This method has the disadvantage that growth rate is not really a local effect as points separate. A better way to measure growth is to measure the growth rate of the tangent vectors to a given orbit. One defines $\lambda = \frac{1}{k} \sum \ln |f'(x(j))|$ for $j=0$ to $k-1$. If λ is > 0 , it gives the average rate of divergence, or, if $\lambda < 0$, it shows convergence.

The Minimum Phase Space dimension for Chaos depends on the type of system considered. A flow or a system of differential equations is considered

first. In this case, the Poincare-Bendixson theorem indicates that there is no chaos in one or two-dimensional phase space. Chaos is possible only in three-dimensional flows. If the flow is non-autonomous (i.e., dependent on time), then time becomes a phase space co-ordinate. Therefore, a system with two physical variables plus a time variable becomes three-dimensional and chaos is possible.

For maps, it is possible to have chaos in one dimension only if the map is not invertible. A prominent example would be a logistic map:

$$x' = f(x) = rx(1-x) \quad (2)$$

10

This equation is provably chaotic for $r=4$ and many other values. Note that for every point $f(x) < 1/2$, the function has two pre-images and hence is not invertible. This concept is important as this method may be used to characterize various topologies of circuits used in realizing a system.

15

Higher order modulation systems such as M-ary phase shift keying ("PSK") and M-ary quadrature amplitude modulation ("QAM") require high levels of channel linearity in order to be successfully deployed. M-ary PSK and QAM systems are expensive to deploy due to the complexity of the system needed to make the architecture compliant with Federal Communications Commission ("FCC") spectral templates. Systems with M-ary QAM or PSK architectures have a "set-top" box to decode the high-speed sub-carrier signals because normal receivers use FM demodulators for recovering the baseband information. In addition, M-ary systems suffer from power loss associated with higher levels of bandwidth compression brought about by the modulation scheme that employ multiple bits per symbol. The M-ary systems become too lossy for practical implementation beyond an upper limit.

20

25

SUMMARY

30

These and other drawbacks and disadvantages of the prior art are addressed by a system and method for signal transmission and reception by narrow band chaotic bi-phase shift keying.

The system includes a forward error correction encoder for receiving input data, a data packetizer in signal communication with the forward error correction encoder, a compression encoder in signal communication with the data packetizer, a radio frequency link in signal communication with the compression encoder, a compression decoder in signal communication with the radio frequency link, a data de-packetizer in signal communication with the compression decoder, and a forward error correction decoder in signal communication with the data de-packetizer for recovering the input data by controlling the orbits of chaos.

The associated method includes the steps of transmitting a signal indicative of chaotic bi-phase shift keyed data, propagating the transmitted signal within a narrow frequency band, and receiving the propagated signal substantially without degradation of the indicated data by controlling the orbits of chaos.

These and other aspects, features and advantages of the present disclosure will become apparent from the following description of exemplary embodiments, which is to be read in connection with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

The present disclosure teaches narrow band chaotic bi-phase shift keying in accordance with the following exemplary figures, in which:

Figure 1 shows a block diagram of a system for narrow band chaotic bi-phase shift keying;

Figure 2 shows a block diagram for a compression encoder in accordance with the system of Figure 1;

Figure 3 shows a block diagram for a compression decoder in accordance with the system of Figure 1;

Figure 4 shows a plot of a skewed tent map for use with the system of Figure 1;

Figure 5 shows a plot of another skewed tent map for use with the system of Figure 1;

Figure 6A shows a schematic diagram for a shift register as a Bernoulli shift process for use with the system of Figure 1; and

Figure 6B shows a function diagram for a shift map to tent map conversion in accordance with the shift register of Figure 6A for use with the system of Figure 1.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

The present disclosure relates to signal transmission and reception using a composite information and chaos signal that is modulated onto a carrier signal by bi-phase shift keying. The disclosure addresses chaos generation using a tent map to aid synchronization between a transmitter and a receiver.

Figure 1 shows a block diagram of a system 110 for narrow band chaotic bi-phase shift keying in an illustrative embodiment of the present disclosure. The system 110 includes a transmitter portion 112, a radio frequency ("RF") link 114 in signal communication with the transmitter 112, and a receiver portion 116 in signal communication with the RF link 114. The transmitter portion 112 includes a forward error correction ("FEC") encoder 118 that uses Reed-Solomon ("RS") error correction code for receiving input data, a data packetizer 120 in signal communication with the FEC encoder 118 for receiving FEC coded data, and a compression encoder 122 in signal communication with the data packetizer 120 for providing encoded data for modulation to the RF link 114. The receiver portion 116 includes a compression decoder 124 for receiving encoded data from the RF link, a data de-packetizer 126 in signal communication with the compression decoder 124, and an FEC decoder 128 that uses RS error correction code in signal communication with the data de-packetizer 126 for receiving FEC coded data and providing output data.

Turning now to Figure 2, an encoder 310 represents an exemplary embodiment of the compression encoder 122 of Figure 1. The encoder 310 includes a divide by ("4.5") divider 312 for receiving a local 18 MHz clock signal, and providing a 4.096 MHz signal. The local clock signal is also received by a divider 314. An edge detector 316 receives input data and provides an edge signal to the divider 314 as well as to a first sequence generator 318 and a

8

second sequence generator 320. The divider 314 provides a CLK9 signal to the first and second sequence generators 318 and 320, respectively. A MUX 322 receives SEQ1 and SEQ2 signals from the sequence generators 318 and 320, respectively, and further receives the input data signal at its output select terminal. The MUX 322 provides an encoded data signal output. Alternately, the encoder provides either 8, 9 or 10 pulses depending on the input data level: 8 clock pulses if there is a low to high transition in the original data, 9 pulses if there is no change or transition and 10 pulses if there is a high to low transition in the original data stream.

Turning now to Figure 3, a decoder 510 represents an exemplary embodiment of the compression decoder 124 of Figure 1. The decoder 510 includes an edge detector 512 for receiving encoded data and providing an EDGE signal to first and second 7-bit binary counters 516 and 520, respectively. A clock divider 514 receives the 18 MHz clock signal and provides a CLKx72 signal to the first and second counters 516 and 520. A count-80 detector 518 is in signal communication with the first counter 516, and feeds a reset signal to the second counter 520. A count-32/40 detector 522 is in signal communication with the second counter 520, feeds each of a load value function 524 and a synchronization function 526, and provides decoded data to a latch 528. The load value function 524 feeds the second counter 520. The synchronization function 526 receives a CLKx1 signal from the clock divider 514, and provides a SYNC clock to the latch 528 at a x1 bit rate. The latch, in turn, provides output data.

In operation, system embodiments have different flows dictated by the architecture of the non-linear systems. The RF transformations are essentially identical in all cases. The primary differences are found in the realization of the maps, flows and the synchronization circuitry. First, generation of maps and flows are considered.

Referring to Figures 4 and 5, a first exemplary skewed tent map function $f(x)$ is generally indicated by the reference numeral 710 of Figure 4, and a second exemplary skewed tent map function 810 is generally indicated by the reference numeral 810 of Figure 5. Transmission of information utilizing skewed

tent maps is considered with iteration of a skewed tent map 710 or 810 centered on 0. Since the only state variable of this dynamical system is directly transmitted, it is a straightforward approach to a non-linear dynamical system. Since the partitioning of the period is asymmetric, the skewed tent map is
 5 always non-invertible. This means that if the time dimension is also factored into this system, a 1-D skewed tent map that exhibits flow is produced. The encoding algorithm is defined as follows:

The bit duration is partitioned into 9 equal sub-intervals by using a x9 clock for the encoding process. If the incoming bit stream has a "0" to "1" transition, then the encoder outputs a width of 10 equal intervals of x9 clock.
 10 When there is a "1" to "0" transition, a width corresponding to 8 cycles of x9 is used for encoding. If there is no change for the data, a width corresponding to a width of "9" clock pulses is encoded. For a tent map to exhibit flow, there should be asymmetry in the partition. Hence, when a width of "9" is output,
 15 there will be no flow.

In the receiver, an exact replica of the transmitter map is generated for comparison, generating an error signal for correction. The decoding algorithm can be forced into synchronism by an initial pattern followed by periodic resetting of the master clock. This way the orbits of chaos are controlled. This
 20 method of synchronization is based on recovered trajectories.

The skewed tent map $f:[0,1] \rightarrow [0,1]$ is given by:

$$\begin{aligned} f(x) &= x/a & \text{if } 0 \leq x \leq a; \\ f(x) &= (1-x)/(1-a) & \text{if } a < x \leq 1 \end{aligned} \quad (3)$$

25

as represented by the function 710 of Figure 4. It is a non-invertible transformation of the unit interval into itself. It depends on the parameter "a", which may be satisfied by the limit $0.5 < a < 1$. The transformation is continuous and piecewise linear, with linear regions $[0,a]$ and $[a,1]$.

30

A unique feature of the presently disclosed approach is to manipulate the encoding process to generate the skewed tent map such that the map will aid in both synchronization as well as data transmission. For this to happen, the map

10

is iterated through many cycles before synchronism is achieved. To aid the iteration process, the skewed tent map is first converted to a higher intermediate frequency, which is then used for iterating the lower frequency signals out of the map since this concept does not work directly at the lower base-band map frequencies.

Next, let $x(k)$ for $k=1,2,\dots,N$ be the transmitted signal, and $y(k)$ for $k=1,2,\dots,N$ be the received signal, and consider both the functions to start from $x(0)$ and $y(0)$. If both trajectories are in the same region until time k :

$$|x(j+1) - y(j+1)| = |f'(x(j))| |x(j) - y(j)| \text{ for } j=0,1,2,\dots,k-1 \quad (4)$$

where $f'(x)$ denotes the derivative of f at a point x . Thus:

$$|x(k) - y(k)| = |f'(x(k-1))| |f'(x(k-2))| \dots |f'(x(0))| |x(0) - y(0)| \quad (5)$$

The above equation can be equivalently stated as:

$$|x(k) - y(k)| = e^{\lambda k} |x(0) - y(0)|, \text{ where } \lambda = 1/k \sum \ln |f'(x(j))| \quad (6)$$

with summation limits for j going from 0 to $k-1$. The interpretation is that λ gives the average rate of divergence, if $\lambda > 0$, or convergence, if $\lambda < 0$, of the two trajectories from each other. Simulations show that about 10 to 15 cycles are typically needed for the convergence of the trajectories. This implies that the intermediate frequency on which the skewed tent map is being transferred is preferably between 50 and 100 times the map frequency to obtain clean, burst free synchronism. The number of limit cycles needed for stabilization by the synchronizing loop influences the choice for the intermediate frequency.

An upper and lower bound for λ are deduced by taking the derivative of $f(x)$ as $f'(x)$. Observing the skewed tent map, the left branch has a slope $1/a > 1$ and the slope for the right branch is $-1/(1-a) < -1$. Now the limits are defined of the derivative for $f(x)$ as $1 < 1/a \leq 1/(1-a)$.

11

A lower and upper bound are deduced for λ as $0 < -\ln(a) \leq \lambda \leq -\ln(1-a)$. In this case, $a = 0.55$, the bounds for λ as $0 < 0.597 \leq \lambda \leq 0.798$. Since the value of λ is > 0 , this indicates a divergent system. If the trajectories of both $x(k)$ and $y(k)$ are followed beyond k , eventually they will fall into different linear regions. The existence of the limit bounds for λ and its independence to a certain degree, of the particular trajectory, is linked to the presence of a unique probability density that is invariant under the action of the map f . For the skewed tent map, an equation for the probability density on $[0,1]$ is:

$$p(x) = a p(ax) + (1-a)p(1-(1-a)x) \quad (7)$$

It follows from Hasler and Maistrenko that a skewed tent map has a constant probability density and the Lyapunov exponent λ can be defined as:

$$\lambda = \int \ln |f'(x)| p(x) dx, \text{ with limits of integration between } 0 \text{ and } 1 \quad (8)$$

For the skewed tent map and constant probability density, the above formula becomes:

$$\lambda = -a \ln(a) - (1-a) \ln(1-a) \quad (9)$$

Thus, $a = 0.55$ yields $\lambda = 0.688$. In order to have robust synchronization, a coupling is chosen with coupling parameters δ and ε . When the transmitter map is coupled to the receiver map, a two dimensional map is defined by:

$$\begin{bmatrix} x(k+1) \\ y(k+1) \end{bmatrix} = G \begin{bmatrix} x(k) \\ y(k) \end{bmatrix} = \begin{bmatrix} f[x(k) + \delta\{y(k) - x(k)\}] \\ f[y(k) + \varepsilon\{x(k) - y(k)\}] \end{bmatrix} \quad (10)$$

12

The coupling parameters δ and ε can take any values. As it turns out, the qualitative behavior of the system depends essentially on $\delta + \varepsilon$. If $\delta = 0$ is set, $x(k)$ is not influenced unless $\varepsilon = 0$ at the same time. Since $x(k)$ influences $y(k)$, this is called the master-slave relationship. The system is defined as

5 synchronized if:

$$||x(k) - y(k)|| \rightarrow 0 \text{ as } k \rightarrow \infty \quad (11)$$

The Jacobian matrix for this condition for $x = y$ can be written as:

10

$$D \begin{Bmatrix} x \\ x \end{Bmatrix} = C \begin{Bmatrix} (1-\delta) & \delta \\ \varepsilon & (1-\varepsilon) \end{Bmatrix} \quad (12)$$

where $c = -1/(1-a)$ if $a \leq x \leq 1$, or $1/a$ if $0 \leq x \leq a$. The eigenvectors are:

15

$$\xi_1 = [1, 1]^T \quad \xi_2 = [\delta, -\varepsilon]^T \quad (13)$$

$$\mu_1(x) = \begin{cases} 1/a & \text{if } x \leq a \\ -1/(1-a) & \text{if } a < x \end{cases} \quad (14)$$

20

$$\mu_2(x) = \begin{cases} 1/a (1 - \delta - \epsilon) & \text{if } 0 \leq x \leq a \\ -1/(1-a) (1 - \delta - \epsilon) & \text{if } a \leq x \leq 1 \end{cases} \quad (15)$$

5

The transverse Lyapunov exponent is $\lambda_t = -a \ln(a) - (1-a) \ln(1-a) + \ln(1-d)$, where $d = \delta + \epsilon$. It is a property of identical skewed tent maps (e.g., transmitter and receiver) coupled in the above manner that they will always have a transverse Lyapunov exponent whenever the coupling parameter $d = \delta + \epsilon$ belongs to the interval $[1 - \Delta, 1 + \Delta]$, where Δ is given by:

$$\ln(\Delta) = a \ln(a) + (1-a) \ln(1-a) \quad (16)$$

15 In the exemplary system, $a = 0.55$. Therefore, Δ has a value 0.5025, and with $\delta = 0$, synchronization occurs only when $\ln(1-d) = 0.4974$.

The information carrying capability of chaotic signals is now considered. Production and disappearance of information in a drive-response system can be represented by either a Bernoulli map or a skewed tent map, where the dynamic mapping of a unit interval into itself is observed. Thus, the synchronizing boundary is where λ is less than zero. For a noiseless channel with disconnected feedback loop, $d=1$, $\lambda_t = -\ln|1-d|$, and $x(k+1) = f(x(k))$, where f is a non-linear function. Hence, the Lyapunov exponent is given by:

$$\lambda = \lim_{k \rightarrow \infty} \frac{1}{k} \sum_{j=0}^{k-1} \ln |f'(x(j))|, \text{ from } j=0 \text{ to } j=k-1 \quad (17)$$

If there is no feedback and no external noise in the receiver, this corresponds to a communication channel with capacity $C = \text{Infinity}$. Synchronization is possible at any high rate of information production by the chaotic system. This shows that for synchronizing the drive and response system in the absence of noise, it is sufficient to have a channel with

30

14

information carrying capacity $C > \lambda$, where $\lambda = \lambda \log_2(e)$. Here, a Lyapunov exponent is expressed as the information-producing rate expressed in base (e) units and λ as the bits per iterate. In this case, 10.7 MHz / 128 KHz iterations = 84 and the bits per iterate is:

5

$$0.688 \log_2(2.71828) = 0.9926 \text{ bits per iteration}$$

(18)

Hence, the average value of information produced can be stated as 84x
 10 0.9926 = 83.3784 bits per second. Applying this result to Shannon-Hartley Channel Capacity theorem, $C = W \log_2(P+N)/N$, where C is the channel capacity, W is the channel bandwidth and (P+N)/N is the signal-to-noise ratio. When compared with a standard linear communication system, the presently disclosed method allows the average information processing capability to go up
 15 by 83 times, assuming no change in channel bandwidth. If, however, the channel bandwidth is reduced by 83 times, our signal-to-noise ratio essentially remains the same as that of a linear communication system. It is a significant advantage of the narrow band chaotic modulation system that a penalty is not incurred in signal-to-noise ratio in order to narrow the bandwidth.

20 In contrast, with a traditional communication system having a fixed channel capacity C, if the bandwidth occupied by the signal is reduced, a higher P+N/N is required to balance the equation. For example, if 830 Kbps of data needs to be sent using a modulation scheme that has a 1 bit/sec/hertz bandwidth efficiency, at least 830 kHz of bandwidth would have been required.
 25 Thus, embodiments of the present disclosure enable 830 kbps to be sent in a 10 kHz bandwidth due to the increased bandwidth efficiency. A traditional linear system will not be able to send 830 kbps in a 10 kHz bandwidth since the required P+N/N is not physically realizable.

As shown in Figures 6A and 6B, first and second portions 910 and 912,
 30 respectively, of an encoding algorithm are indicated. In the first portion 910, a Bernoulli shift process is implemented with a standard shift register 914 in communication with a D/A converter 916 to provide a signal 918 corresponding

to $x_{k+1} = 2x_k \bmod[1]$. In the second portion 912, the effect of a binary to gray conversion 919 is illustrated as the conversion from the defining equation $x_{k+1} = 2x_k \bmod[1]$, provided by the Bernoulli shift process and indicated by the reference numeral 920, to the gray-level equation $x_{k+1} = 1 - 2 |x_k - 0.5|$ as indicated by the reference numeral 922.

The simplified block diagram of the tent map generator 912 of Figure 6B provides the sequence of outputs of the shift register 914 with random inputs approximating a Bernoulli Shift process: $x_{k+1} = 2x_k \bmod [1]$. If $x_k = 0.b_7b_6...b_1b_0$ for the case with an 8-bit shift register, an output $x_{k+1} = 0.b_7b_6...b_1b_{in}$ will be present where b_{in} is the new bit of information. This operation corresponds to a multiplication by a factor of 2 and a mod[1] operation. The latter corresponds to the elimination of the most significant bit ("MSB") at each step. The binary-to-gray converter 919 translates the dynamics of the Bernoulli shift map into that of a tent map 922 described by the equation:

$$x_{k+1} = 1 - 2 |x_k - 0.5|$$

(19)

If there is a "0" to "1" transition, the partition of the tent map is at 4 divisions from the origin, and, if there is a "1" to "0" transition, the partition is at 5 divisions from the origin. The entire bit duration has 9 divisions.

In order to generate this map, a counter with parallel output is fed with a 2×9 data clock so that it has time to go through two complete count cycles. The parallel output from the counter/shift register is passed through a binary to gray code converter and to a digital-to-analog converter ("DAC"), which provides a tent map. The counter is reset as per the algorithm outlined above, leading to asymmetric partitioning of a bit duration. Thus, due to the constraint on the symbol dynamics, the perturbation introduced is very small and needs only minimal bandwidth to flow and be detected.

With this system architecture, embodiments of the present disclosure include the ability of the encoding scheme, signal conditioning and modulating

elements of the transmitter to restrict the bandwidth required to send information over a channel. Demodulation is accomplished by various methods such as PLL, FM Discriminator or a higher gain phase detector. Most of the popular modulation schemes employing M-ary techniques keep the modulator "on" or "off" over the whole duration of the symbol times. Certain bandwidth efficient schemes such as, for example, Feher's modulation scheme, Minimum Shift Keying ("MSK"), and raised cosine shaped Offset Quadrature Phase Shift Keying ("OQPSK") attempt to restrict the bandwidth of the modulation components. The waveforms used are periodic, with well-defined boundaries and, hence, interpolation techniques can be applied to reconstruct the signal back in the receiver.

The minimum bandwidth required to send information across a channel is a function of the energy per bit and the noise bandwidth. The described exemplary embodiments of the present disclosure integrate the limiting conditions for maximizing the channel capacity by reducing the noise bandwidth, employing a single side-band ("SSB") modulation scheme, restricting the periodicity of the data to about one half of the bitrate, phase shift keying the transition boundaries of the encoded bit stream, and combining the two outputs of the phase modulator to give a single axis modulation system.

In addition, the encoded waveform is differentiated before being applied to the modulator. The sharp edges of the differentiated waveform turn the modulator on or off for short durations. The positive going pulse gives the LO signal a $0 \pm \varphi$ degrees phase shift and a negative going pulse will give the LO a $180 \pm \varphi$ degrees phase shift. φ is calculated as π / m where $m=9$ in this particular case. Typically, the perturbation at the phase change point on the modulated signal has reached a steady-state condition within 2 to 3 carrier cycles. The non-uniformly phase shift keyed signal from the bi-phase modulator is combined using a transformer hybrid. The output of this combiner is a double side-band signal with suppressed carrier. The carrier and the upper side-band are rejected by a 2-pole crystal filter centered at 10.7 MHz.

The encoding process ensures that the periodicity of the phase changes happen within a window of 0.44 to 0.55 of the bit rate. Thus, the side-band

created out of modulation of the first local oscillator, at 10.764 MHz, with the differentiated encoder pulse train, will fall within a 7.4 KHz bandwidth around 10.7 MHz. This signal is further up-converted to an appropriate band for transmission. The above method can be used at various frequencies. Choice of
5 the first local oscillator ("LO") is based on the following criteria:

- a) The first LO is chosen to have at least 10 carrier cycles between modulation signal bit boundaries.
- b) Availability of low cost (e.g., industry standard) crystal filters.
- 10 c) Choose first LO = Crystal frequency \pm 1/2 bitrate. For example, for a 128 kbps signal, choose the first LO to be 10.7 \pm 64 KHz.

Exemplary embodiments of the present disclosure include an encoding and decoding system that converts the incoming non-return to zero ("NRZ") bit
15 stream into a variable bit-width stream, thereby altering the spectral characteristics of the original NRZ signal. An exemplary set of rules for encoding is as follows:

- 1) If there is a change from 0 to 1, increase the width of the bit to include
20 10 clock cycles.
- 2) If there is no change, maintain the bit width to include 9 clock cycles.
- 3) If there is a 1 to 0 transition, decrease the original NRZ bit width to include 8 clock cycles.

25 Although increasing and/or decreasing pulse widths to accommodate either 10 clock cycles or 8 clock cycles have been shown for exemplary purposes, higher encoded clock cycles are also possible. It shall be noted that system performance in view of multi-path effects on a SSB system, as well as zero-crossing detection accuracy, will be elements that may limit the use of a
30 much higher encoding and/or decoding clock in alternate embodiments.

The coding technique is unique in that if the encoded waveform is observed closely, depending on whether there was a 1-to-0 transition or a 0-to-1

transition on the original NRZ waveform, the encoded waveform would have the phase change points, later or earlier than the phase change points associated with the bit boundaries. When there are no changes to the levels in the original NRZ waveform, as is the case with repeated bits, the phase transitions happen at the bit boundaries.

There is only one transition per bit, and, on the receiver side, the signal reconstruction in the receiver utilizes the periods between adjacent pulses to recover the NRZ information. The output of the encoder is passed through a differentiator that gives a 90 degree phase shift to the modulating signal. This results in a differentiated signal that is positive going for a "low" to "high" transition and negative going for a "high" to "low" transition of the encoded waveform. The differentiated encoded output is used as a modulating signal in the bi-phase modulator. A carrier at a nominal frequency of the SSB filter frequency \pm (bit rate) * 1/2 is chosen in order to facilitate low cost design for the system. Commonly available embodiments may use SSB filters at 6 MHz, 10.7 MHz, 21.4 MHz, 70 MHz, 140 MHz, and the like.

The differentiator is designed so as to turn on the modulator for approximately 1/9th of the entire bit duration, starting at the level transition points of the width encoded waveform. This unique modulation scheme results in the modulation process happening only for the duration that the differentiated pulse is of significant amplitude to turn the modulator "on". A linear-phase band-pass filter is required to filter out the "out of band" Fourier components as well as the carrier and one of the side bands. The output of this band-pass filter is a single side-band pulse-modulated ("PM") or frequency-modulated ("FM") signal that has information embedded in it in the form of phase or frequency modulation, respectively. This signal is frequency translated to the 900 MHz frequency band.

In an exemplary embodiment, the transmitter frequency is chosen to be at 902.77 MHz. The digital sub-carrier is at 10.764 MHz. A Gilbert cell mixer used as a bi-phase modulator is modulated with the signal from the encoder at a nominal rate of 64KHz. The resulting sidebands are at 10.7 MHz and at 10.828

MHz. A narrowband filter at 10.7MHz removes the digital sub-carrier at 10.76 MHz as well as the upper sideband at 10.828 MHz.

The second LO is chosen to be 892.07 MHz. The entire Digital signal transmission spectrum is within a bandwidth of 20 kHz. The receiver includes a
5 down converter at 892.07 MHz. The output from the down converter is at 10.7MHz. This signal is processed after sufficient band pass filtering and amplification by a limiter. The 10.7 MHz filter must possess minimal group delay characteristics. The narrowband filter used is very similar to the semi-lattice filters used in amateur radios as well as reported in Filter Design Handbook by
10 Zverev.

An FM discriminator or a PLL is used that, as a Phase change detector, can be used detect and regenerate the variable bit width signal similar to the one in the transmitter. Since the spatio-temporal characteristics of the signal are employed to make an unambiguous detection, a higher gain in the detector will
15 enhance the Minimum signal detection capability of the system. PLL's need adequate signal-to-noise ratios ("SNR") for proper detection. Moreover It is very difficult to have fast tracking capability with narrow tracking range. FM discriminators suffer from very low detector gains. Since a self similar replica of the original signal of proper amplitude and phase is used at the receiver for
20 detection, both the above systems work with poor efficiencies at low SNRs.

To address these issues, a new high-speed detector is provided. The signal from the Limiting section is fed into an injection amplifier that helps to maintain a steady output level for varying input levels. The injection amplifier acts as a fast tracking filter with minimal group delay in its tracking range.
25 Further, the output from the injection amplifier splits into two branches. One branch is passed through an oscillator at 10.7 MHz with a high Q tank circuit. This operation virtually strips all modulation from the signal out of the limiter and provides a reference signal. This branch may be referred to as the modulation stripper branch.

30 The other branch is fed into either a D flip-flop or an EX-OR gate. The output of the EX-OR gate or the D flip-flop will indicate phase change points. Since the zero-crossing points on the FM discriminator, PLL or the new phase

change detector are a series of pulses occurring at different instants of time, the output of the detector will vary in periodicity like the transmitted encoded wave form. Since most of the signal has been filtered off, both at the transmitter as well as the receiver, the energy of the spikes out of the detector is very low and there will be other spikes between the responses. To mitigate these spikes a one-shot is used.

The output from the detector will have only two pulse widths instead of the three widths that were originally used to modulate the transmitter. This is because the phase detector has a range from 0 to π . If the modulated bit width is "10", a signal phase can exceed π . When this happens, the response folds back to the position that an "8" would occur. However, since both widths do not happen simultaneously, there are no Inter-Symbol Interference ("ISI") problems.

Instead of the EX-OR or D flip-flop for phase detection, a balanced modulator can be employed with the reference signal fed out of the modulation stripper branch and the signal out of the injection amplifier to the comparison branch. The IF output port will clearly show the phase change points. In order to enhance performance, noise must be kept to a minimum in the detection branch. This signal is this bit stream to reconstruct the original NRZ signal. The phase change output from the mono shot will capture only one pulse. This will correspond to the bit width "8". A clock signal is generated out of this signal so that the decoder can be clocked.

Another output from the phase change detector is processed through a mono-shot that will capture both the pulses but will filter out all the spikes in between the wanted signal is fed into a D flip-flop and clocked by the clock signal. The output of this flip-flop will be the original unencoded data.

Referring back to Figure 1 for a base-band data processing method, plain data from an external source is first block encoded for Forward Error Correction ("FEC") using a Reed-Solomon ("RS") error-correction code. A packetizer adds header and other redundant bits to FEC blocks and forms data packets. Packetized data is subjected to compression channel encoding. The encoded

data is then modulated by a radio frequency ("RF") circuit to be transmitted over an RF link.

In the receiver, encoded data received over the RF link is demodulated to a base band signal and passed to the decoder. The decoded data is de-packetized and FEC data blocks are fed to an RS decoder circuit. The RS decoder circuit validates and corrects errors. The error free original plain data stream is delivered to a destination. The steps involved in the encoding and decoding processes are further described below.

A transmitter 112 includes an FEC Encoder 118 wherein the raw user data is grouped into blocks of 235 bytes each. RS coding (255, 235) is applied to each block. For a block of 235 bytes, 20 bytes of error check bytes are added. A packetizer 120 adds header and trailer bits to the FEC encoded data blocks to send as packets. A compression encoder 122 encodes data packets for compression using a unique encoding scheme.

A receiver 116 includes a compression decoder 124 where a received data stream from an RF stage is decoded to retrieve original data packets. A de-packetizer 126 removes header and other pre-amble from received data packets. Moreover, an FEC decoder 128 processes FEC coded received data blocks for error correction.

The encoding scheme is based on input data edge transitions. The encoded data width varies depending upon the input data transition. A higher clock is used at nine times the data bit rate. This clock is referred to as CLK_9 or CLKx9. The resulting code has three phase positions: 8, 9 or 10 times width of CLK_9 depending upon the input data transitions. A low-to-high transition is represented by 8 clock periods, a high-to-low transition is represented by 10 clock periods, and no transition is represented by 9 clock periods.

Encoded data has a transition for each input data bit. This allows the code to achieve the advantages of bi-phase coding where a base-band spectrum is clustered about two bands. Using further carrier suppression, high bandwidth efficiency is achieved. In addition, the output code transition is at the center of each bit. This further improves bandwidth efficiency.

An exemplary implementation for the encoder is now described with respect to Figure 2. For an odd division ratio, an MP3 audio source needs a clock of 4.096 MHz for its operation. In the present system, an 18.432 MHz crystal is used as frequency source. This requires an odd division ratio of 4.5.

5 The division is implemented using finite state machine design. A basic counter counts 000 to 111. The most significant bit is XOR'ed with the clock to give an additional edge at the transition from count 011 to 100. In addition, the counting sequence is controlled using a state machine. Effectively, count 4 is extended to count 4.5.

10 An input data edge is detected using a digital technique. There are two edge-triggered latches used to capture positive and negative edges of input data respectively. These latches are cleared with a 'clear latch' signal that is generated at a rising edge of the clock in a synchronous fashion. There are two advantages of this type of edge detection. First, unlike conventional edge

15 detection, external resistor and capacitor use is avoided. A second and more important advantage is that the edge remains visible until the rising edge of the local clock, which is used as reference for all phase transitions. This avoids the problem of missing an edge due to a race condition, and also allows straightforward synchronous digital design implementations.

20 The local clock is divided to generate the CLK_9 clock, which is used for encoding. This clock generation is synchronized with the input data edges, and is used as an input to sequence generators. Two sequence generators are used to generate the encoded output. One generates 5 1's and 4 0's, the other generates 4 1's and 5 0's. The choice of 5 and 4 allows a change of encoded

25 waveform at the center of each data bit.

A multiplexer selects an output of the sequence generators depending on the input data state. The output of the multiplexer is compression-encoded data. The output from the encoder is low-pass filtered. This renders the varying-width pulses to tent and inverted tent maps, which are then used to modulate the 10.7

30 MHz sub-carrier.

Decoding is accomplished as shown in Figure 3. The decoding scheme works based on the encoded data input edge and width. Two 7-bit binary

counters are used to measure incoming data width, and a decision for the output data is based on these counters. The input edge detection circuit synchronizes the counter values. A soft decision technique is applied with a variable threshold to decide the state of the output data. A clock at the data bit rate is generated locally and synchronized with the input data stream. Output data is then latched with the synchronized clock.

An input data edge is detected using a digital technique. This is the same as done in the encoder. There are two edge-triggered latches used to capture positive and negative edges of the input data, respectively. These latches are cleared with a 'clear_latch' signal that is generated at the rising edge of the clock in a synchronous fashion.

A local crystal clock generator at 18 MHz is divided to generate two clock signals. CLK_72 is 72 times the data rate. This is used for data sampling and input data width counting. The other clock is same as the data rate and is used for latching the final data output.

The first counter ("counter1") is used to track an input data width of 10 from the encoder CLK_9 clock. Since, in the decoder, CLK_72 is used for a counter, a count of 80 indicates the event of counting a width 10 pulse. When the counter1 count reaches 80, the count80 detector circuit resets counter2. This is a unique event and always represents reception of a logic 0, followed by a logic 1. Counter2 is a 7-bit binary counter that counts 0 to 127 in free running mode.

The count32/40 detector circuit controls the counting sequence of counter2. A count 32/40 detector is implemented as follows: On every detected edge, a constant is loaded into the counter. The constant value is decided based upon the count at the edge and can be one of the following values: If the edge occurs 32 (i.e., 4 x 8) counts after reset, the constant value is 88 (i.e., 128 - 40). If the edge occurs 40 (i.e., 5 x 8) counts after reset, the constant value is 96 (i.e., 128 - 32).

The constant values are chosen so that at the beginning of next incoming encoded data bit, the counter reaches a count of zero. This is used for output data transition generation. The constant as decided by the count32/40 detector

circuit is stored in this circuit and loaded to counter2 at the rising edge of encoded data. The event of counter2 reaching a count of zero is recorded in the synchronization circuit and used for synchronizing the locally generated clock. Decoded data is latched with the synchronized clock, and the output of the latch
5 is the final decoded data.

Thus, the present disclosure provides a new type of secure, synchronized communication system using chaotic frequency modulation. A novel feature of this system is that the information bit stream is encoded in such a manner as to generate a coupled skewed tent map of the possible trajectories of the wave-
10 form in order to stay within a bounded state-space region. An incidental advantage is that while transformation is to an Intermediate RF frequency, the whole chaotic perturbation can be contained in a very narrow bandwidth, thus reducing the noise in the system. The technique used here enables analog signals to be encoded into the digital realm and processed as digital signals
15 within the same confinements of bandwidth. At the receiver side, a similar algorithmic generator is used to synchronize the receiver to the transmitter.

Realization of the symbol dynamics and encoding for maximum distance between the neighbors for adequate resolution, without impairing the non-linear chaotic process in the digital signal, allows flexibility in terms of adjustment of
20 system parameters for synchronization. The systems disclosed herein have significant advantages over prior systems.

First, the system is digital. Second, chaotic sequences need to have a delay element (EX-OR) element in the symbolic encoder. The encoding sequence automatically factors in the delay depending on the level transition of the input
25 digital stream.

Third, chaotic synchronization happens due to the coupled skewed tent maps arising out of the encoder modifying the stationary chaotic process, which can be detected by a fast detector that looks for phase perturbations. The encoding algorithm automatically allows synchronization as well as information
30 transmission. A combination of the symbolic algorithm and the non-linear chaos generation automatically generates an RF Tent map. This process is unique in

that it allows for sharp noise reducing filters on both transmitter and receiver, resulting in superior noise performance.

Fourth, due to the choice of the encoding algorithm, the relative orbits of the spatial orbits can be controlled very precisely. This means that the look-up window is extremely constrained due to the symbolic selection. As long as the band-pass filter can pass through the chaotic signal faithfully, decoding can be accomplished at the receiver by ensuring that the Lyapunov exponent is negative.

Fifth, prior disclosures of chaotic systems were essentially diverging or spread-spectrum in nature with relatively low amounts of data transfer. The present system is capable of transmitting 10-12 Mbps in a 20-25 KHz bandwidth. This defies Shannon's bound in the traditional sense. Kolmogorov-Sinai bounds are applied to the entropy function to explain the theory of operation. Intuitively, as this is a spatio-temporal modulation that has a tightly controlled constrain, the uncorrelated part of the signal does not carry any required information, and hence, can be filtered off.

Sixth, the choice of the encoding methodology allows seamless interface with various standards without having to develop complicated Media Access Control ("MAC") layers. Seventh, the presently disclosed constraint in the symbolic states substantially reduces the required bandwidth of the resultant modulation.

Therefore, architectures in accordance with the present disclosure address the limitations of the existing systems in terms of cost and complexity. Furthermore, system embodiments are capable of realizing multiple high-speed digital services over bandwidth constrained RF bands. Flexible architecture enables any radio, television or cellular station to be able to send separate digital information on separate sub-carriers on either side of the fundamental transmitting frequency, without violating FCC power spectral templates. Modulation and demodulation processes are very similar to conventional radio receivers, and hence, can be integrated with existing radio architectures.

In summary, embodiments of the present disclosure provide for low-complexity and high data-rate communication systems that are inherently secure,

MAC free, and easily interfaced with existing systems. Multi-path effects are minimal because the embodiments use a timed modulation scheme wherein the energy occupancy for detection is a miniscule portion of the entire bit width.

These and other features and advantages of the present disclosure may be readily ascertained by one of ordinary skill in the pertinent art based on the teachings herein. It is to be understood that the teachings of the present disclosure may be implemented in various forms of hardware, software, firmware, special purpose processors, or combinations thereof.

The teachings of the present disclosure may be implemented as a combination of hardware and software. Moreover, the software is preferably implemented as an application program tangibly embodied on a program storage unit. The application program may be uploaded to, and executed by, a machine comprising any suitable architecture. Preferably, the machine is implemented on a computer platform having hardware such as one or more central processing units ("CPU"), a random access memory ("RAM"), and input/output ("I/O") interfaces. The computer platform may also include an operating system and microinstruction code. The various processes and functions described herein may be either part of the microinstruction code or part of the application program, or any combination thereof, which may be executed by a CPU. In addition, various other peripheral units may be connected to the computer platform such as an additional data storage unit and an output unit.

It is to be further understood that, because some of the constituent system components and method function blocks depicted in the accompanying drawings may be implemented in software, the actual connections between the system components or the process function blocks may differ depending upon the manner in which the present disclosure is programmed. Given the teachings herein, one of ordinary skill in the pertinent art will be able to contemplate these and similar implementations or configurations of the present disclosure.

As will be recognized by those of ordinary skill in the pertinent art based on the teachings herein, alternate embodiments are possible. Given the teachings of the disclosure provided herein, those of ordinary skill in the pertinent art will contemplate various alternate configurations and

implementations of the transmitter 112 and the receiver 116, as well as the other elements of the system 110, while practicing within the scope and spirit of the present disclosure.

Although the illustrative embodiments have been described herein with
5 reference to the accompanying drawings, it is to be understood that the present disclosure is not limited to those precise embodiments, and that various changes and modifications may be effected therein by one of ordinary skill in the pertinent art without departing from the scope or spirit of the present disclosure. All such
10 changes and modifications are intended to be included within the scope of the present disclosure as set forth in the appended claims.

CLAIMS

What is claimed is:

1. A method for signal transmission and reception comprising:
5 transmitting a signal indicative of chaotic bi-phase shift keyed data;
propagating the transmitted signal within a narrow frequency band; and
receiving the propagated signal substantially without degradation of the
indicated data by controlling the orbits of chaos.
- 10 2. A method as defined in Claim 1 wherein said transmitting
comprises:
providing input data;
encoding the provided data for forward error correction;
packetizing the encoded data; and
15 compressing the packetized data to supply encoded data for modulation.
3. A method as defined in Claim 1 wherein the narrow frequency band
comprises a radio frequency band of less than about 20 kHz bandwidth.
- 20 4. A method as defined in Claim 1 wherein said receiving comprises:
decompressing the data indicated by the propagated signal;
de-packetizing the decompressed data; and
decoding the de-packetized data to provide output data substantially
without degradation from the transmitted data.
- 25 5. A method as defined in Claim 2 wherein said encoding comprises
modulating a composite information and chaos signal onto a carrier signal by bi-
phase shift keying to form the chaotic bi-phase shift keyed data.
- 30 6. A method as defined in Claim 2 wherein said compressing
comprises:

29

bi-phase modulating a composite information and chaos signal onto a carrier signal in accordance with a non-linear mapping function;

combining the bi-phase modulated signals to form a double side-band signal with suppressed carrier signal; and

5 rejecting the suppressed carrier signal and one of the upper side-band signal and the lower side-band signal.

7. A method as defined in Claim 6 wherein said compressing further comprises mapping a bit interval into itself in accordance with a skewed tent map corresponding to the non-linear mapping function.

8. A method as defined in Claim 7 wherein said skewed tent map exhibits flow.

15 9. A method as defined in Claim 4 wherein said decoding comprises demodulating a composite information and chaos signal from a carrier signal by high-speed detection to substantially recover the transmitted data.

10 10. A method as defined in Claim 9 wherein said high-speed detection comprises phase detection.

11. A method as defined in Claim 1 wherein the encoded data is represented with Reed-Solomon error-correction code.

25 12. A method as defined in Claim 1 wherein the signal indicative of chaotic bi-phase shift keyed data is responsive to chaos generation using a non-linear mapping function to aid synchronization between said transmitting and said receiving.

30 13. A method as defined in Claim 12 wherein said non-linear mapping function comprises a skewed tent map.

30

14. A method as defined in Claim 1 wherein the signal indicative of chaotic bi-phase shift keyed data is an intermediate frequency signal.

15. A method as defined in Claim 1, further comprising at least one of:
5 buffering the signal indicative of chaotic bi-phase shift keyed data prior to propagation; and
buffering the signal indicative of chaotic bi-phase shift keyed data following propagation.

10 16. A method as defined in Claim 2 wherein said encoding comprises deriving a chaos signal by bi-phase shift keying in accordance with a non-linear mapping function that exhibits flow.

15 17. A method as defined in Claim 16 wherein said non-linear mapping function that exhibits flow is a skewed tent map.

18. A method as defined in Claim 4 wherein said decoding comprises deriving a chaos signal by at least one of a phase comparison and a frequency comparison in accordance with a non-linear mapping function that exhibits flow.

20 19. A method as defined in Claim 18 wherein said non-linear mapping function comprises a skewed tent map.

25 20. A method as defined in Claim 18 wherein said decoding further comprises:

generating an exact replica of a transmitter map for comparison in accordance with said at least one of a phase comparison and a frequency comparison; and
generating an error signal for correction.

30

21. A method as defined in Claim 1, further comprising synchronizing said receiving with an initial pattern followed by periodic resetting of a clock signal to control the orbits of chaos.

5 22. A system (110) for narrow band chaotic bi-phase shift keying comprising:

a forward error correction encoder (118) for receiving input data;

a data packetizer (120) in signal communication with said forward error correction encoder;

10 a compression encoder (122) in signal communication with said data packetizer;

a radio frequency link (114) in signal communication with said compression encoder;

15 a compression decoder (124) in signal communication with said radio frequency link;

a data depacketizer (126) in signal communication with said compression decoder; and

20 a forward error correction decoder (128) in signal communication with said data depacketizer for recovering said input data by controlling the orbits of chaos.

23. A system as defined in Claim 22 wherein said forward error correction encoder comprises:

an encoder (214) for receiving high-speed bit-stream data;

25 a map generator (216) in signal communication with said encoder;

a local oscillator (218) in signal communication with said map generator;

an intermediate frequency filter (224) in signal communication with said local oscillator; and

30 at least one of a radio frequency filter (232) and an amplifier in signal communication with said intermediate frequency filter wherein the at least one radio frequency filter or amplifier is responsive to a carrier signal.

32

24. A system as defined in Claim 23 wherein said encoder comprises:
an edge detector (316) for receiving input data;
at least one clock divider (312, 314) in signal communication with said
edge detector for receiving a clock signal;
5 at least one sequence generator (318, 320) in signal communication with
said edge detector and said at least one clock divider; and
a multiplexer (322) in signal communication with said at least one
sequence generator.

10 25. A system as defined in Claim 22 wherein said forward error
correction decoder comprises:

a local oscillator (416);
at least one of a low noise amplifier and a mixer (414) in signal
communication with said local oscillator for receiving a propagated signal;
15 a band-pass filter (418) in signal communication with said at least one low
noise amplifier or mixer;
an intermediate frequency amplifier (420) in signal communication with
said band-pass filter;
a demodulator (422) in signal communication with said intermediate
20 frequency amplifier;
at least one of a level translator and a filter (424) in signal communication
with said demodulator; and
a data decoder (426)) in signal communication with said at least one level
translator or filter for driving a high-speed data channel.

25 26. A system as defined in Claim 25 wherein said band-pass filter is
tunable.

27. A system as defined in Claim 25 wherein said data decoder
30 comprises:

an edge detector (512) for receiving encoded data;

33

at least one counter (516, 520) in signal communication with said edge detector;

at least one count detector (518, 522) in signal communication with said at least one counter;

5 a synchronizer (526) in signal communication with said at least one count detector; and

a latch (528) in signal communication with said synchronizer for latching output data.

10 28. A system as defined in Claim 25 wherein said data decoder further comprises at least one of a phase comparator and a frequency comparator.

29. A system for signal transmission and reception, the system comprising:

15 means for transmitting a signal indicative of at least one of chaotic bi-phase shift keyed data and chaotic phase shift keyed data;

means for propagating the transmitted signal within a narrow frequency band; and

20 means for receiving the propagated signal substantially without degradation of the indicated data by controlling the orbits of chaos.

30. A system as defined in Claim 29 wherein said means for transmitting comprises:

means for providing input data;

25 means for encoding the provided data for forward error correction;

means for packetizing the encoded data; and

means for compressing the packetized data to supply encoded data for modulation.

30 31. A system as defined in Claim 29 wherein the narrow frequency band comprises a radio frequency band of less than about 10 kHz bandwidth.

34

32. A system as defined in Claim 29 wherein said means for receiving comprises:

means for decompressing the data indicated by the propagated signal;

means for de-packetizing the decompressed data; and

5 means for decoding the de-packetized data to provide output data substantially without degradation from the transmitted data.

33. A system as defined in Claim 30 wherein said means for encoding comprises means for modulating a composite information and chaos signal onto
10 a carrier signal by bi-phase shift keying to form the chaotic bi-phase shift keyed data.

34. A system as defined in Claim 30 wherein said means for compressing comprises means for modulating a composite information and chaos
15 signal onto a carrier signal in accordance with a non-linear mapping function.

35. A system as defined in Claim 34 wherein said means for compressing further comprises means for mapping a bit interval into itself in accordance with a skewed tent map.

20

36. A system as defined in Claim 35 wherein said skewed tent map exhibits flow.

37. A system as defined in Claim 32 wherein said means for decoding
25 comprises means for demodulating a composite information and chaos signal from a carrier signal by means for high-speed detection to substantially recover the transmitted data.

38. A system as defined in Claim 37 wherein said means for high-speed
30 detection comprises means for at least one of phase detection and frequency detection.

39. A system as defined in Claim 29, further comprising means for representing the encoded data with Reed-Solomon error-correction code.

40. A system as defined in Claim 29 wherein the signal indicative of
5 chaotic bi-phase shift keyed data is responsive to chaos generation using a means for non-linear mapping to aid synchronization between said means for transmitting and said means for receiving.

41. A system as defined in Claim 40 wherein said means for non-linear
10 mapping comprises means for defining a skewed tent map.

42. A system as defined in Claim 29 wherein the signal indicative of chaotic bi-phase shift keyed data is an intermediate frequency signal.

43. A system as defined in Claim 29, further comprising at least one of:
15 means for buffering the signal indicative of chaotic bi-phase shift keyed data prior to propagation; and
means for buffering the signal indicative of chaotic bi-phase shift keyed data following propagation.

20

44. A system as defined in Claim 30 wherein said means for encoding comprises means for deriving a chaos signal by bi-phase shift keying in accordance with a means for non-linear mapping that exhibits flow.

25 45. A system as defined in Claim 44 wherein said means for non-linear mapping that exhibits flow comprises means for defining a skewed tent map.

46. A system as defined in Claim 32 wherein said means for decoding comprises means for deriving a chaos signal by at least one of a phase
30 comparison and a frequency comparison in accordance with a means for non-linear mapping that exhibits flow.

36

47. A system as defined in Claim 46 wherein said means for non-linear mapping comprises means for defining a skewed tent map.

48. A system as defined in Claim 46 wherein said means for decoding
5 further comprises:

means for generating an exact replica of a transmitter map for comparison in accordance with said means for at least one of a phase comparison and a frequency comparison; and

10 means for generating an error signal for correction.

49. A system as defined in Claim 29, further comprising:

means for synchronizing said means for receiving with an initial pattern;

and

15 means for periodic resetting of a clock signal to control the orbits of chaos.

50. A program storage device readable by machine, tangibly embodying a program of instructions executable by the machine to perform method steps for signal transmission and reception, the method steps comprising:

20 transmitting a signal indicative of at least one of chaotic bi-phase shift keyed data and chaotic phase shift keyed data;

propagating the transmitted signal within a narrow frequency band; and

receiving the propagated signal substantially without degradation of the indicated data by controlling the orbits of chaos.

25

51. A program storage device as defined in Claim 50 wherein said step for transmitting comprises steps for:

providing input data;

encoding the provided data for forward error correction;

30 packetizing the encoded data; and

compressing the packetized data to supply encoded data for modulation.

52. A program storage device as defined in Claim 50 wherein the narrow frequency band comprises a radio frequency band of less than about 10 kHz bandwidth.

5 53. A program storage device as defined in Claim 50 wherein said step for receiving comprises steps for:

decompressing the data indicated by the propagated signal;

de-packetizing the decompressed data; and

10 decoding the de-packetized data to provide output data substantially without degradation from the transmitted data.

54. A program storage device as defined in Claim 51 wherein said step for encoding comprises a step for modulating a composite information and chaos signal onto a carrier signal by bi-phase shift keying to form the chaotic bi-phase
15 shift keyed data.

55. A program storage device as defined in Claim 51 wherein said step for compressing comprises a step for modulating a composite information and chaos signal onto a carrier signal in accordance with a non-linear mapping
20 function.

56. A program storage device as defined in Claim 55 wherein said step for compressing further comprises a step for mapping a bit interval into itself in accordance with a skewed tent map.

25 57. A program storage device as defined in Claim 56 wherein the skewed tent map exhibits flow.

58. A program storage device as defined in Claim 53 wherein said step
30 for decoding comprises a step for demodulating a composite information and chaos signal from a carrier signal by high-speed detection to substantially recover the transmitted data.

59. A program storage device as defined in Claim 58 wherein said step for high-speed detection comprises a step for at least one of phase detection and frequency detection.

5

60. A program storage device as defined in Claim 50 wherein the encoded data is represented with Reed-Solomon error-correction code.

61. A program storage device as defined in Claim 50 wherein the signal
10 indicative of chaotic bi-phase shift keyed data is responsive to chaos generation using a non-linear mapping function to aid synchronization between said step for transmitting and said step for receiving.

62. A program storage device as defined in Claim 61 wherein said non-
15 linear mapping function comprises a skewed tent map.

63. A program storage device as defined in Claim 50 wherein the signal
indicative of chaotic bi-phase shift keyed data is an intermediate frequency
signal.

20

64. A program storage device as defined in Claim 50, further comprising
a step for at least one of:

buffering the signal indicative of chaotic bi-phase shift keyed data prior to
propagation; and

25 buffering the signal indicative of chaotic bi-phase shift keyed data
following propagation.

65. A program storage device as defined in Claim 51 wherein said step
for encoding comprises a step for deriving a chaos signal by bi-phase shift keying
30 in accordance with a non-linear mapping function that exhibits flow.

66. A program storage device as defined in Claim 65 wherein the non-linear mapping function that exhibits flow is a skewed tent map.

67. A program storage device as defined in Claim 53 wherein said step
5 for decoding comprises a step for deriving a chaos signal by at least one of a phase comparison and a frequency comparison in accordance with a non-linear mapping function that exhibits flow.

68. A program storage device as defined in Claim 67 wherein the non-
10 linear mapping function comprises a skewed tent map.

69. A program storage device as defined in Claim 67 wherein said step
for decoding further comprises steps for:

generating an exact replica of a transmitter map for comparison in
15 accordance with said step for at least one of a phase comparison and a frequency comparison; and

generating an error signal for correction.

70. A program storage device as defined in Claim 50, further comprising
20 steps for:

synchronizing said step for receiving with an initial pattern; and
periodic resetting of a clock signal to control the orbits of chaos.

1/5

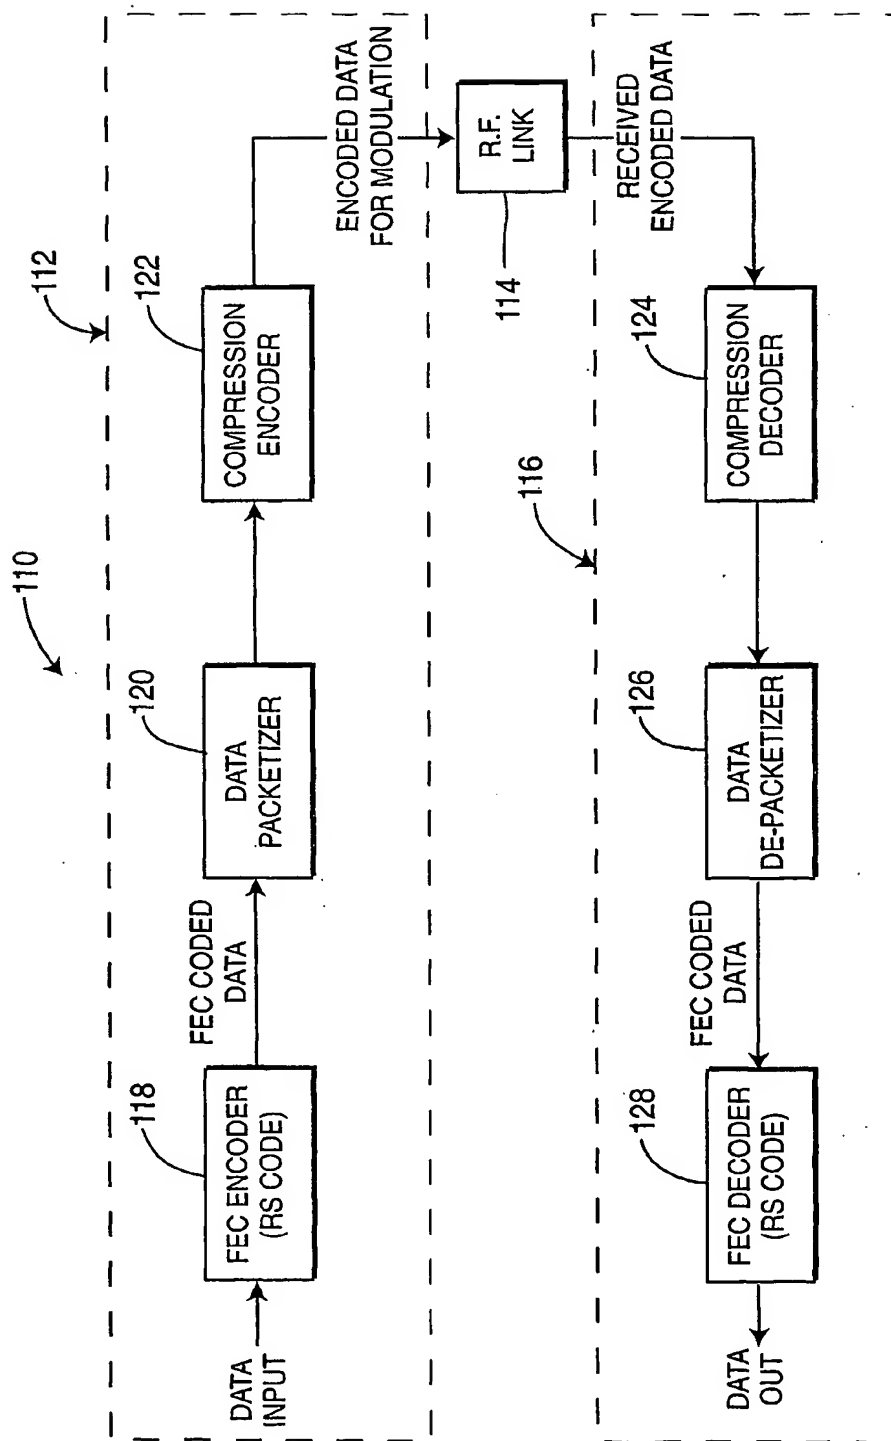


FIG. 1

2/5

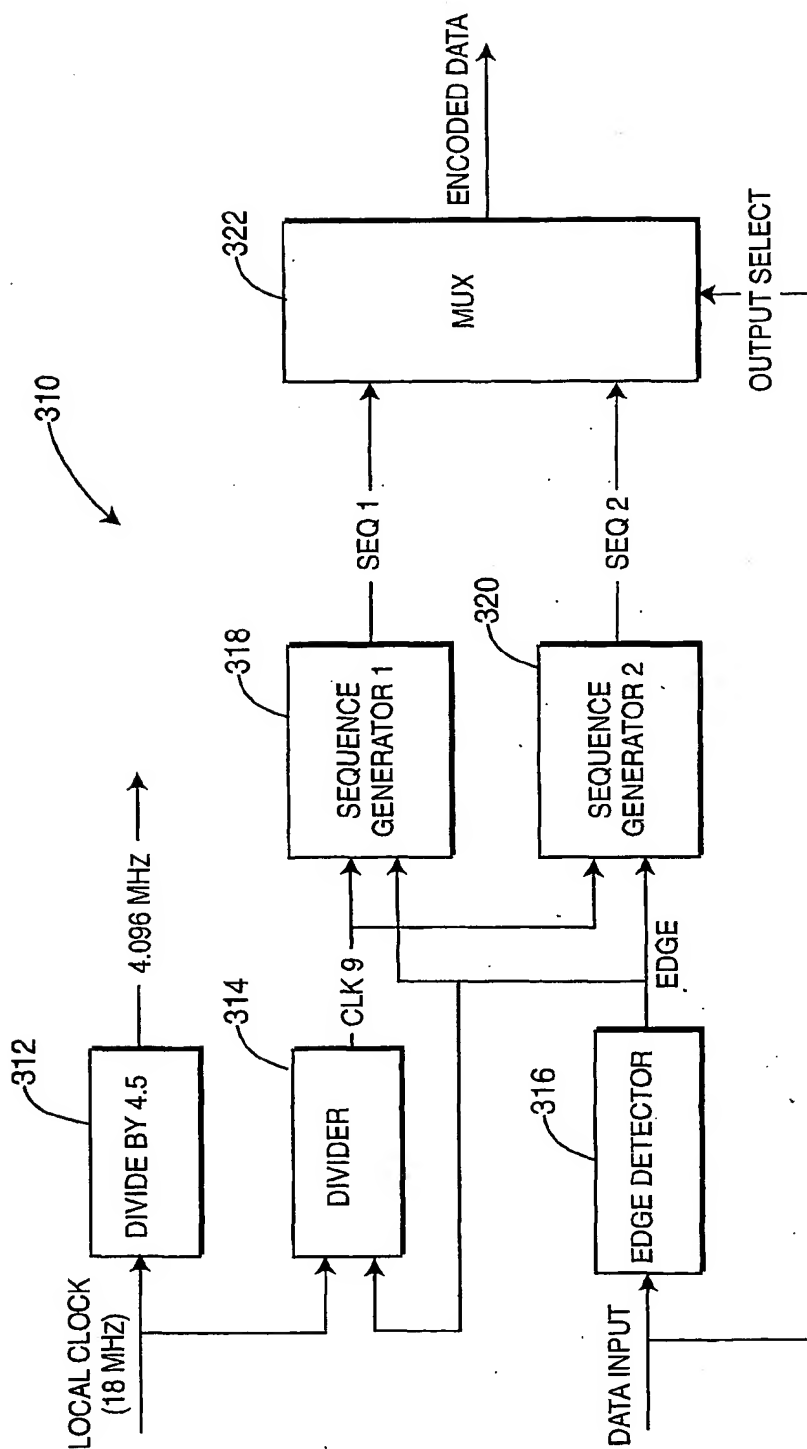


FIG. 2

3/5





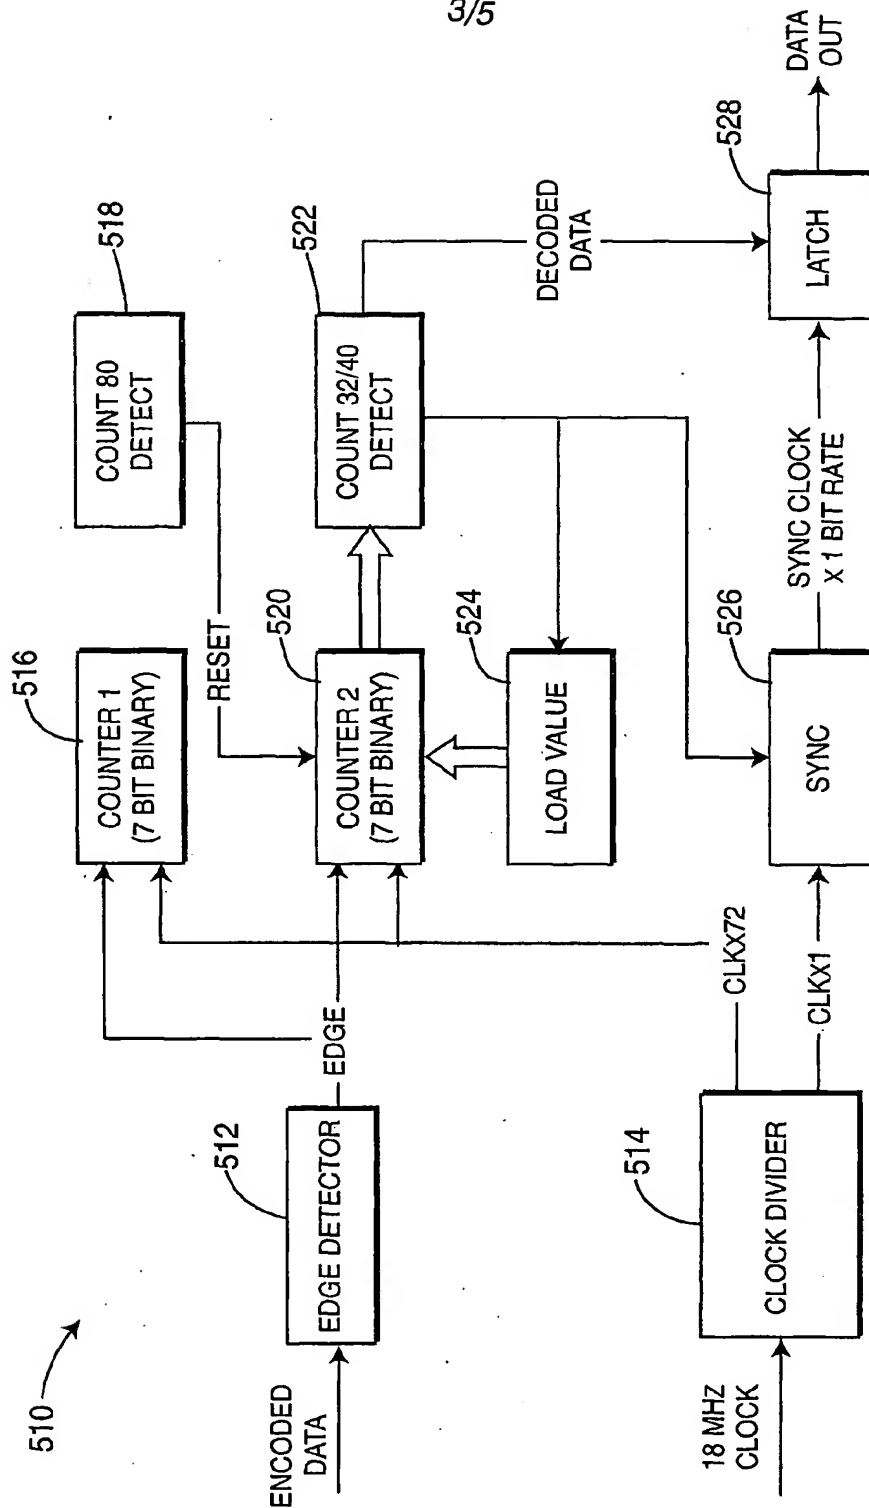



FIG. 3

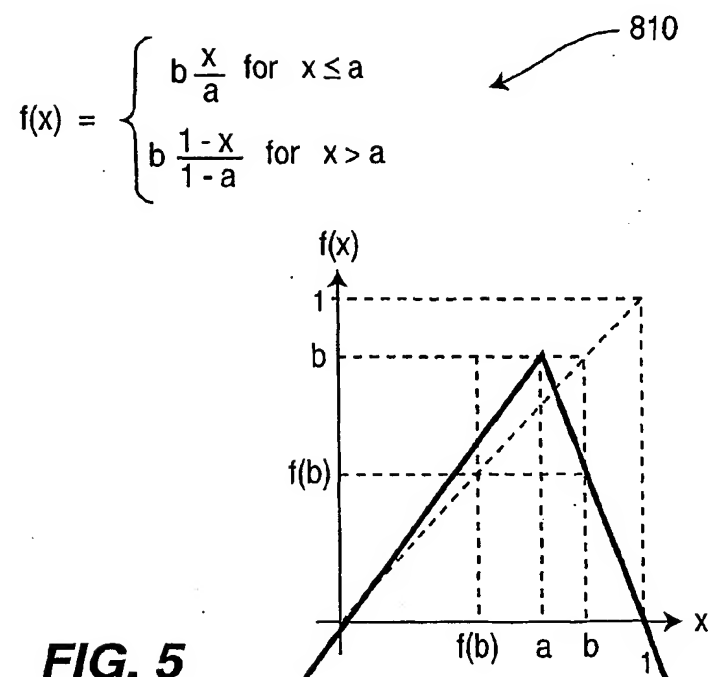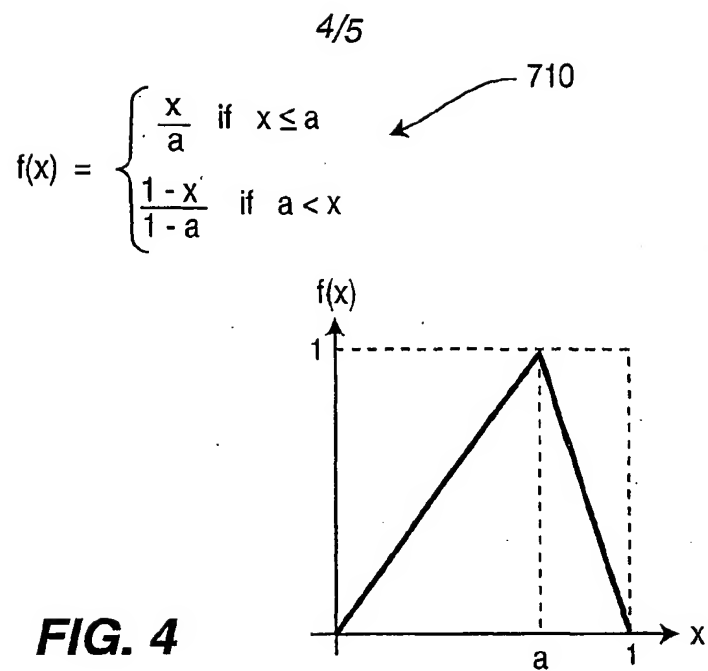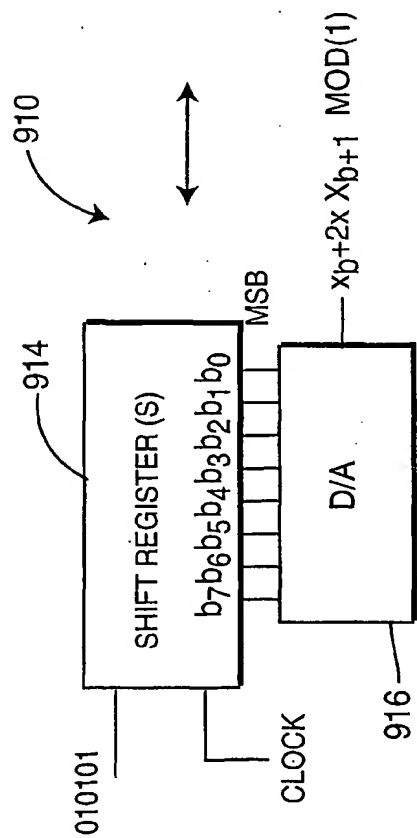

5/5

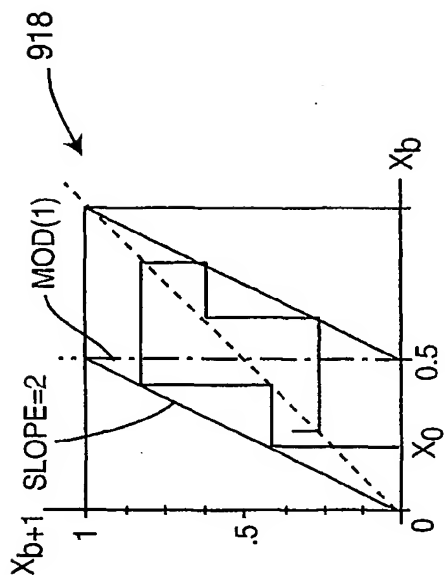

(a)

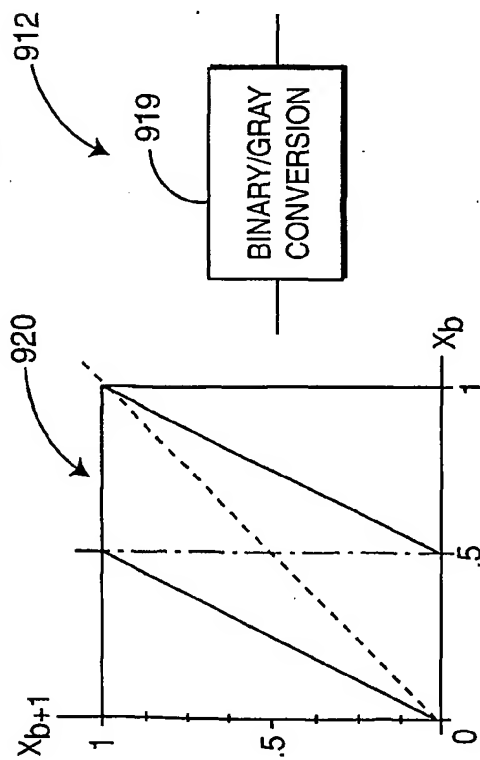

(b)

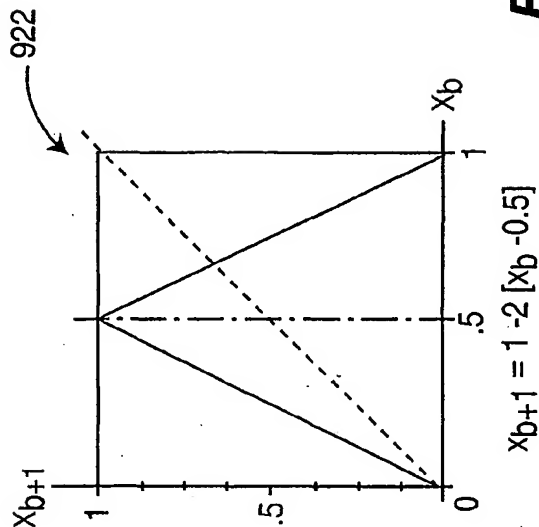


FIG. 6

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 02/15412

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04L27/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, INSPEC, COMPENDEX

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>KOH C L ET AL: "DIGITAL COMMUNICATION METHOD BASED ON M-SYNCHRONIZED CHAOTIC SYSTEMS"</p> <p>IEEE TRANSACTIONS ON CIRCUITS AND SYSTEMS I: FUNDAMENTAL THEORY AND APPLICATIONS, IEEE INC. NEW YORK, US, vol. 44, no. 5, 1 May 1997 (1997-05-01), pages 383-390, XP000724591 ISSN: 1057-7122</p> <p>page 383, left-hand column, paragraph 1 page 383, left-hand column, paragraph 3 -page 383, right-hand column, paragraph 4 page 384, left-hand column, paragraph II.A -page 386, left-hand column, paragraph III.B</p> <p style="text-align: center;">--- -/--</p>	<p>1,3,5, 9-11,14, 15,22, 26,29, 31,33, 37-39, 42,43, 50,52, 54, 58-60, 63,64</p>



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

5 September 2002

Date of mailing of the international search report

16/09/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3018

Authorized officer

Schiffer, A

INTERNATIONAL SEARCH REPORT

 II International Application No
 PCT/US 02/15412

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>KOLUMBAN G ET AL: "THE ROLE OF SYNCHRONIZATION IN DIGITAL COMMUNICATIONS USING CHAOS -PART I: FUNDAMENTALS OF DIGITAL COMMUNICATIONS"</p> <p>IEEE TRANSACTIONS ON CIRCUITS AND SYSTEMS I: FUNDAMENTAL THEORY AND APPLICATIONS, IEEE INC. NEW YORK, US, vol. 44, no. 10, 1 October 1997 (1997-10-01), pages 927-936, XP000722574</p> <p>ISSN: 1057-7122</p> <p>figure 1</p>	1-70
A	<p>HASLER M: "Current problems for the transmission of information chaotic signal"</p> <p>CONTROL OF OSCILLATIONS AND CHAOS, 1997. PROCEEDINGS., 1997 1ST INTERNATIONAL CONFERENCE ST. PETERSBURG, RUSSIA 27-29 AUG. 1997, NEW YORK, NY, USA, IEEE, US, 27 August 1997 (1997-08-27), pages 195-200, XP010250685</p> <p>ISBN: 0-7803-4247-X</p> <p>page 196, left-hand column, paragraph 5</p> <p>-page 199, right-hand column, paragraph 3</p>	1-70
A	<p>HASLER M ET AL: "AN INTRODUCTION TO THE SYNCHRONIZATION OF CHAOTIC SYSTEMS: COUPLED SKEW TENT MAPS"</p> <p>IEEE TRANSACTIONS ON CIRCUITS AND SYSTEMS I: FUNDAMENTAL THEORY AND APPLICATIONS, IEEE INC. NEW YORK, US, vol. 44, no. 10, 1 October 1997 (1997-10-01), pages 856-866, XP000722566</p> <p>ISSN: 1057-7122</p> <p>page 858, paragraph IV -page 865, paragraph VI</p>	1-70
A	<p>BERNHARDT P A: "COMMUNICATIONS USING CHAOTIC FREQUENCY MODULATION"</p> <p>INTERNATIONAL JOURNAL OF BIFURCATION AND CHAOS IN APPLIED SCIENCES AND ENGINEERING, SINGAPORE, SG, vol. 4, no. 2, 1994, pages 427-440, XP000828403</p> <p>abstract</p> <p>page 428, right-hand column, paragraph 2.1</p> <p>-page 430, right-hand column, paragraph 2.2</p>	1-70